



特性 Features

- 灯罩: PC
- 灯体: ABS
- Light body: ABS
- Straight: AL

型号含义 Ordering Information

TL90-N - 3 □ □ - R Y G

型号 Type

TL90-N

层数 Layers

3

额定电压 Voltage

01: 12VDC 02: 24VDC

功能 Features

空白: 常亮 A: 蜂鸣连续音 B: 蜂鸣间断音 FC: 常亮或闪亮蜂鸣双音
 No letters: Always light A: Buzzer Continuous sound
 B: Buzzer Discontinuous sound FC: Always light or Flashing Buzzer double sound

发光颜色 LED Color

● 红-R ● 黄-Y ● 绿-G

额定参数 Rating



电压 Voltage	电流(mA)Current		重量 Weight	颜色 Color
	LED	蜂鸣器 Buzzer		
DC12V	60	50	常亮: 230g 常亮, 蜂鸣: 240g	
DC24V	20	50	常亮, 闪亮, 蜂鸣: 250g	

用户定做范围 Custom range



- 镀铬灯体
- 12V/AC和24V/AC
- 1m, 2m, 3m的绝缘橡胶电缆
- Chrome body
- 12V/AC and 24V/AC
- 1m, 2m, 3m insulated rubber cable

接线示意图 Wiring Diagram

- 常亮闪亮和带蜂鸣型 Always light and with buzzer type

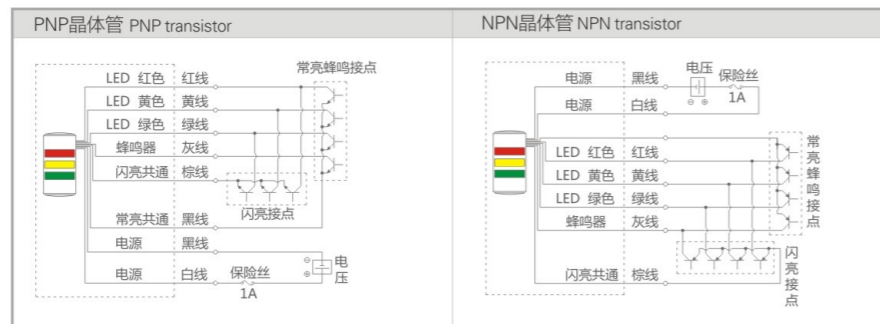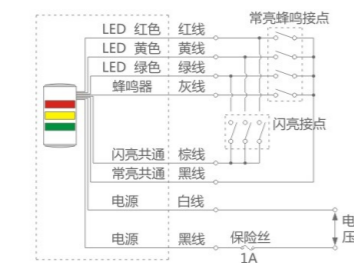

- 常亮和带蜂鸣型 Always light and with buzzer type

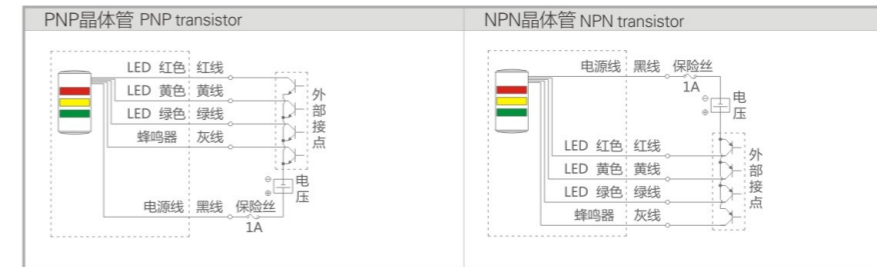

品名 LED Color	信号线颜色 Signal line color
红色LED	红色 Red
黄色LED	黄色 Yellow
绿色LED	绿色 Green
蜂鸣器 Buzzer	灰色 Grey

晶体管 (NPN/PNP)	
电流容量 Current capacity	$I_c \geq 100mA$
耐电压 Voltage resistance	$V_c \geq 35V$
漏电流 leakage current	$< 0.1mA$

电压 Voltage	信号线电压 Signal line Voltage	LED信号线电流		蜂鸣器 Buzzer	
		红,黄 Red, Yellow	绿 Green	信号线电流 Signal line current	峰值电流 Peak current
DC 12V	DC 12V	60mA	60mA	50mA	400mA
DC 24V	DC 24V	20mA	20mA	50mA	400mA

- 所有电压的保险丝: 1A
- DC电源不分正负极性
- 产品无蜂鸣器的不配置蜂鸣器信号线
- 信号线: 引出型<规格UL1007 AWG22>
- 电源线: 引出型<规格UL1015 AWG18>
- 棕色线上请不要施加电压
- Fuses for all voltages: 1A
- DC power supply without positive and negative polarity
- Products without buzzer signal cable is not configured
- Signal Line: Lead-Out Type <Specification UL1007 AWG22>
- Power Cord: Lead-out Type <Specification UL1015 AWG18>
- Do not apply voltage on the brown wire

安装尺寸 Installation Dimensions

